


REV.	ECN No.	DESCRIPTION	DRAWN BY

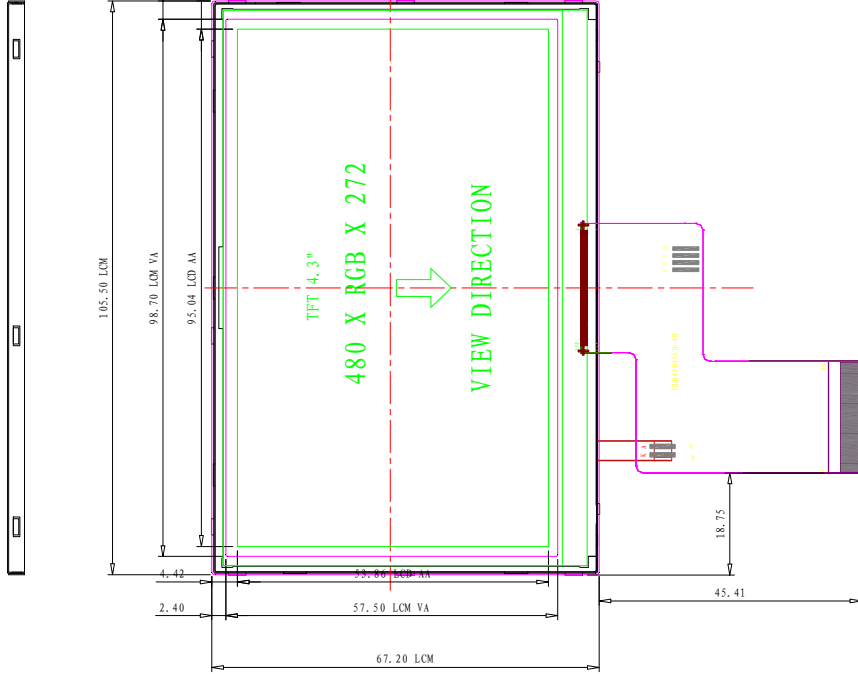

A1 • • K1

B/L CIRCUIT DIAGRAM

- NOTE:
- LCD TYPE : 4.3" TFT
 - DRIVER IC : 12 O'CLOCK
 - VIEWING DIRECTION : WHITE LED 7 CHIPS Parallel
 - BACKLIGHT :
 - OPERATION TEMP : -20°C~70°C
 - STORAGE TEMP : -30°C~80°C
 - GENERAL TOLERANCE: ±0.2
 - Connector : FH19-40S-05SH(51)
 - * IS IMPORTANT DIMENSION

NO.	SIGNAL
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	GND
30	CLK
31	DISP
32	Hsync
33	Vsync
34	RESERVE GND
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YU(NC)

NT043045C0-40

TOLERANCE	SCALE	N.T.S	DRG DATE	MODEL
X ±	UNITS	mm	14.05.26	480(RGB)X272 DOTS
.XX ±	MATERIAL		DRG BY	TITLE
∠ ± 1°			CHK BY	DWG NO
			APPROVED	P/N

VER.	01
------	----